



KAREN ELLISON, RECORDER

Assessor's Parcel Number: N/A

Date: JULY 15, 2019

Recording Requested By:

Name: HEATHER MACDONNELL, PUBLIC WORKS

Address: _____

City/State/Zip: _____

Real Property Transfer Tax: \$ N/A

CHANGE ORDER NO.05 (#2019.125)

(Title of Document)

Date of Issuance: 06/27/2019
 Owner: Douglas County
 Contractor: Resource Development Company
 Engineer: Keller Associates
 Project: NVWWTP Improvements

Effective Date: 06/27/2019
 Owner's Contract No.: 15501
 Contractor's Project No.: 18017
 Engineer's Project No.: 216030
 Contract Name: NVWWTP Improvements

The Contract is modified as follows upon execution of this Change Order:

Description: See page 2 of this document for further descriptions.
 Attachments: Change order description, PCO #11

CHANGE IN CONTRACT PRICE	CHANGE IN CONTRACT TIMES [note changes in Milestones if applicable]
Original Contract Price: \$ 9,155,284.00	Original Contract Times: NTP: June 25, 2018 Substantial Completion: 480 Days (October 18, 2019) Milestone #1: 365 Days (June 25, 2019) Ready for Final Payment: 540 days (December 17, 2019) days
[Increase] {Decrease} from previously approved Change Orders No. <u>N/A</u> to No. <u>N/A</u> : \$ 151,339.72	[Increase] {Decrease} from previously approved Change Orders No. <u>1</u> to No. <u>4</u> : Substantial Completion: 101 days Milestone #1: 101 days Ready for Final Payment: 101 days
Contract Price prior to this Change Order: \$ 9,306,623.72	Contract Times prior to this Change Order: Substantial Completion: 581 Days (January 27, 2020) Milestone #1: 466 Days (October 24, 2019) Ready for Final Payment: 641 Days (March 27, 2020) days
[Increase] {Decrease} of this Change Order: \$ 8,468.05	[Increase] {Decrease} of this Change Order: Substantial Completion: 0 Days Milestone #1: 0 Days Ready for Final Payment: 0 Days
Contract Price incorporating this Change Order: \$ 9,315,091.77	Contract Times with all approved Change Orders: Substantial Completion: 581 Days (January 27, 2020) Milestone #1: 466 Days (October 24, 2019) Ready for Final Payment: 641 Days (March 27, 2020)

RECOMMENDED: By: <u>[Signature]</u> Engineer (if required) Title: Project Engineer Date: 06/27/2019	ACCEPTED: By: <u>[Signature]</u> Owner (Authorized Signature) Title: DIRECTOR PUBLIC WORKS Date: 07-02-19	ACCEPTED: By: <u>[Signature]</u> Contractor (Authorized Signature) Title: Project Manager Date: 6/28/19
---	---	---

Owner (Authorized Signature)
 By: [Signature]
 Title: County Manager

FILED
 NO. 2019-125
 7-15-19
 DATE

Change Order Descriptions

1. PCO #11 – CL1DIV2 WAS Flowmeter upgrade
 - a. This PCO includes upgrading the WAS flowmeter to be installed in a class 1 division 2 location. The flow meter included by Xylem was not rated to be installed in this environment.
 - b. \$8,468.05
 - c. 0 Contract Days

COOPY



RESOURCE DEVELOPMENT COMPANY

PCO #11 – CL1DIV2 WAS Flowmeter Upgrade

Date: Revised - June 20, 2019

Project: NVWWTP Improvements

ATTN: Jeremy Wilson, PE – Keller Associates

Mr. Wilson,

Pricing is provided below for upgrading the WAS flowmeter to Class 1, Division 2.

CL1DIV2 Flowmeter	\$8,331.50
NEMA 4X Flowmeter Credit	<\$2,128.50>
Restocking Fee	\$425.70
Return Shipping	\$85.00
RDC PCO Coordination (4 hr @ \$120/Hr)	\$480.00
<u>Subtotal</u>	<u>\$7,193.70</u>
Markup (15%)	\$1,079.06
Tax	\$374.21
<u>Tax <Credit></u>	<u><\$178.92></u>
Total Cost:	\$8,468.05

Additional Contract Days: None

Please don't hesitate to contact me if you have any questions or need any clarification.

Thank you,

Brandon Beckman

Brandon Beckman
Resource Development Company

Cc: Ron Roman, PE – DCPW
Scott McCullough – DCPW

Attachments: Xylem Quote, Flowmeter Cutsheet

1050 Linda Way Sparks, NV 89431-5598
(775) 356-8004 / Fax (775) 356-0610
Nevada License No. 75026 / California License No. 893537

From your local Endress+Hauser
Representative – Forberg Scientific



scientific.inc.
forberg

Endress+Hauser 
People for Process Automation

XYLEM WATER SOLUTIONS USA INC
 N27W23293 ROUNDY DR
 PEWAUKEE WI 53072

Contact : Forberg - Paul Gauger

Item	QTY	Order code	Description
10	1	PC	<p>Promag 10W1H, DN100 4" Model no.: 10W1H-HL0A1RN2B4AA</p> <p>Electromagnetic flowmeter</p> <p>H Liner: Hard rubber L Process Connection: Cl.150, A105, flange ANSI B16.5 0 Electrodes: 1.4435/316L A Calibration: 0.5% 1 Additional Test: w/o R Approval: FM NI Cl. I Div. 2 / CSA Cl. I Div. 2 N Housing: Field Alu, sensor IP68 NEMA6P 2 Cable, Remote Version: 10m/30ft coil and signal cable B Cable Entry: Thread NPT 1/2 4 Power Supply; Display: 85-250VAC; 2-line, push buttons A Adjustment; Software Feature: Factory setup; basic version A Output: 4-20mA HART + pulse passive Details: Language: English Assign line 1: Volume flow Assign line 2: Totalizer 1 Assign current output: Volume flow Current span: 4-20 mA HART US Value 20 mA: 300.00000 USgal/min Time constant: 1.00000 s Assign pulse output: Volume flow Pulse value (per pulse): 2.00000 USgal Pulse width: 100.00000 ms Output signal: Passive - negative Failsafe mode current/pulse output: Min. value Assign totalizer 1: Volume flow Unit totalizer 1: USgal</p>

Production time: 41 days

Brandon Beckman

From: Rutter, David - Xylem <David.Rutter@Xylem.com>
Sent: Wednesday, March 6, 2019 8:12 AM
To: Brandon Beckman (bbeckman@resourcedevelopmentco.com)
Cc: Baghernejad, Bijan - Xylem
Subject: Minden, NV; Xylem No. 17-9054A
Attachments: 9054 Pre-EQ Rising-Stem T-Valve.pdf; 9054 E&H Flowmeter Cut Sheet.pdf

Brandon,

I received pricing from our Sales Group for the following items:

1. One (1) Class 1 Div 2 Flowmeter, 4. Sell Price = \$8,331.50
2. Two (2) Four inch T-Valves with rack-and-pinion, rising-stem actuator, per the attached cut sheet. Sell Price = \$5270.65 each

Best regards,

David Rutter
Xylem Inc.
PH: 414-365-2219



CONFIDENTIALITY NOTICE: This e-mail, including any attachments and/or linked documents, is intended for the sole use of the intended addressee and may contain information that is privileged, confidential, proprietary, or otherwise protected by law. Any unauthorized review, dissemination, distribution, or copying is prohibited. If you have received this communication in error, please contact the original sender immediately by reply email and destroy all copies of the original message and any attachments. Please note that any views or opinions presented in this e-mail are solely those of the author and do not necessarily represent those of Xylem Inc.

Brandon Beckman


From: Rutter, David - Xylem <David.Rutter@Xylem.com>
Sent: Wednesday, March 27, 2019 8:00 AM
To: Brandon Beckman (bbeckman@resourcedevelopmentco.com)
Subject: FW: Minden, NV; Xylem No. 17-9054A

Brandon,

The amount is \$2128.50 less a 20% restock fee.

Best regards,

David Rutter
Xylem Inc.
PH: 414-365-2219

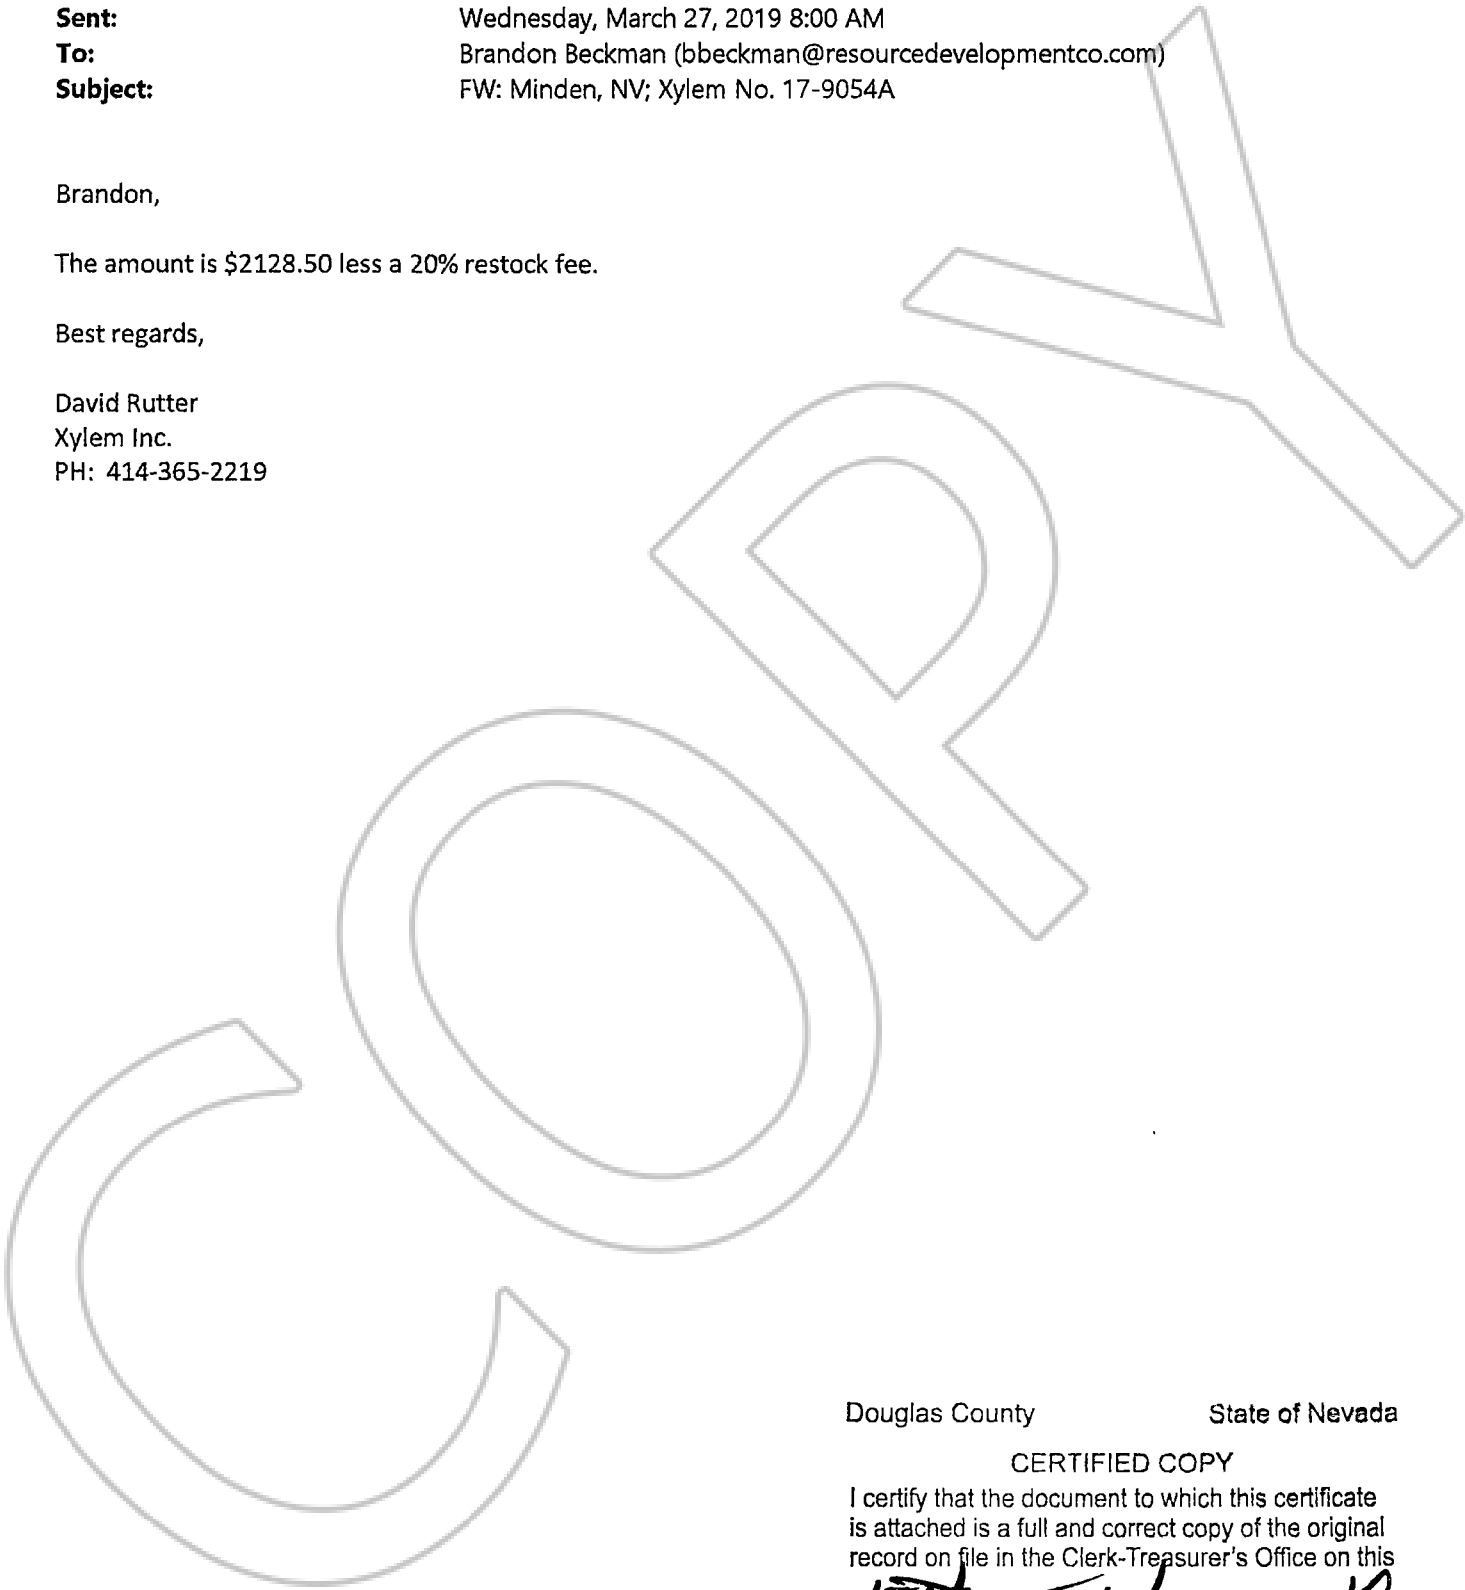

Douglas County State of Nevada

CERTIFIED COPY

I certify that the document to which this certificate is attached is a full and correct copy of the original record on file in the Clerk-Treasurer's Office on this

15th day of March, 2019

By [Signature]